


INTERNAL LED BIG SCREEN



**ALLPRIDE
SIGNS** Est.1989

(P) (02) 4942 3099 (Email) sales@allpride.com.au
(Address) 1/18 Oakdale Rd, Gateshead NSW 2290

INTERNAL LED BIG SCREEN

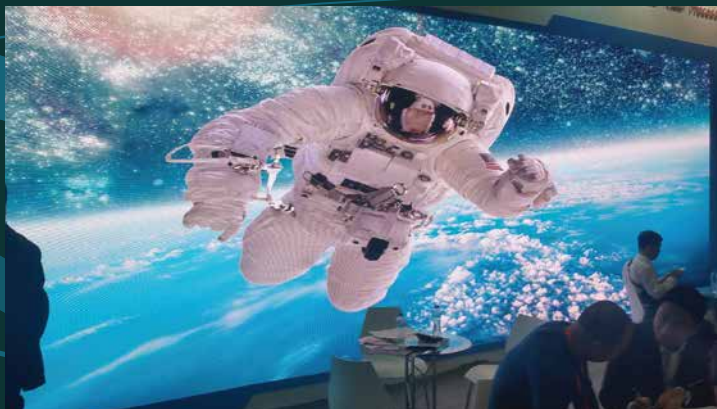

Specs (P3)

Physical Parameters

Pixel Configuration	2121Black Face 3in1 SMD
Pixel Pitch(mm)	3
Pixel Density (pixel/m ²)	111111
Pixel Matrix Per Panel (Module Resolution)	64 X32
Module Dimensions(W x H)/(mm)	192 X96
Cabinet Resolution	192x192
Cabinet Dimensions (L x W x H)/(mm)	576x576
Module Quantity/Cabinet	3x6=18(Pcs)
Panel Material	Die-Casting Aluminum

Processing Parameters

Display Colors	687Million
Refresh Rate (Hz)	≥1200
Driving Type	1/16

Led Parameters

R	d(620-625nm) IV:(120-160mcd)
G	d(520-525nm)IV:(350-450mcd)
B	d(465-470nm)IV:(35-45mcd)

Optical Parameters

Brightness (CD/m ²)	≥1500
The Optimal Viewing Distance(m)	2-20
Display Mode	640x480/800x600/1024x768
Optimal Horizontal Viewing Angle (°)	150
Optimal Vertical Viewing Angle (°)	120

Electrical Parameters

Maximum Power Consumption (W/m ²)	750
Average Power Consumption (W/m ²)	250

Operation Parameters

Ingress Protection	31(IP)
Control Mode	Video Sync
Communication	Cats(≤120m)/Fiber Optical(10.000m)



**ALLPRIDE
SIGNS** Est.1989